



## <Plug-in Type>

## <Wireless Type>

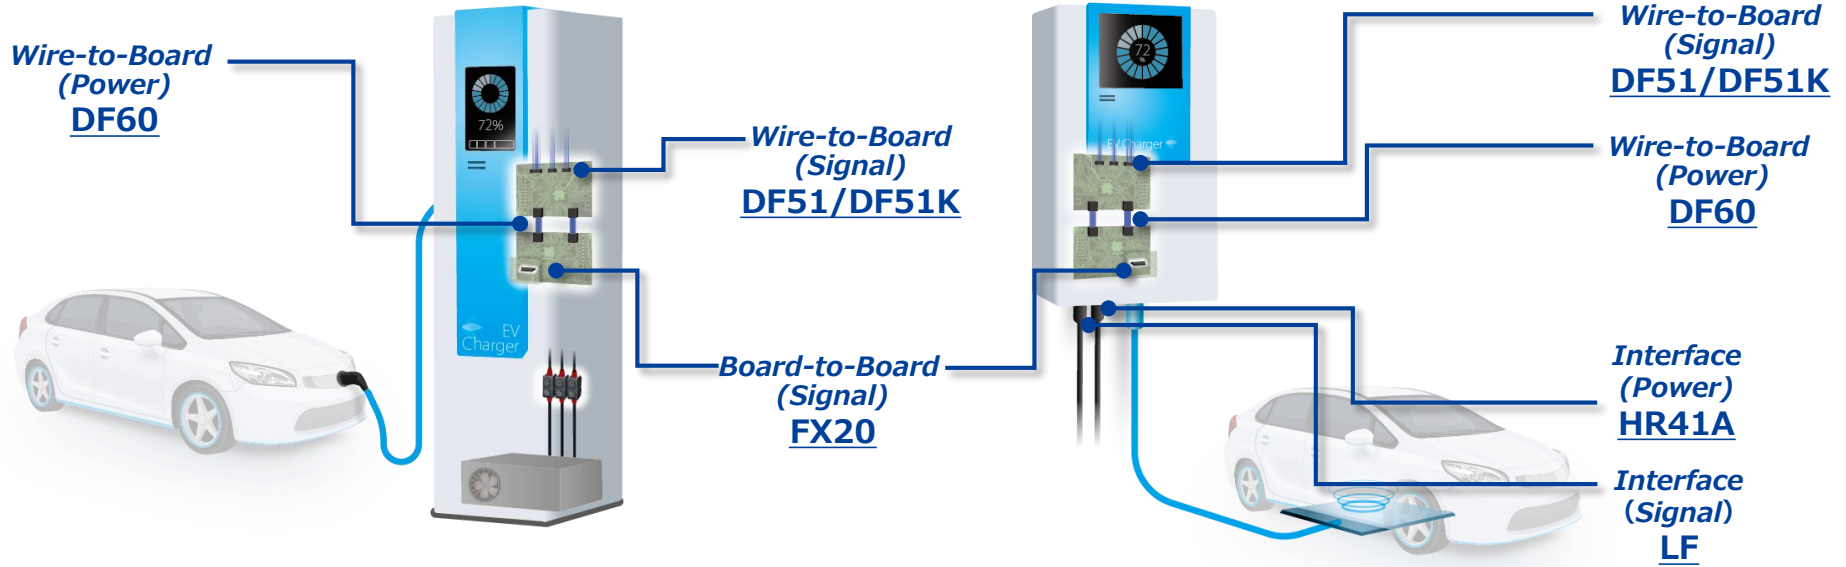

Visit HRS for More

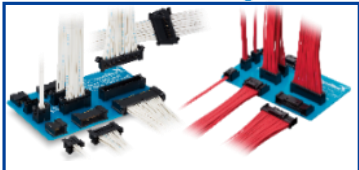


### DF51/DF51K Series

2mm Pitch,  
Positive Lock,  
Wire-to-Board



### DF60 Series

65A Max.\*Current,  
Positive Lock,  
Wire-to-Board  
\*UL Standard



### FX20 Series

0.5mm Pitch,  
Floating,  
Board-to-Board



### HR41A Series

IP67/IP68 Waterproof,  
Weather-resistant  
Connector for  
Outdoor Use



### LF Series

IP67/IP68 Waterproof,  
Shielded I/O Connector



### DF22

Rated Current : 30A Max.  
Rated Voltage : 1000V AC/DC  
Pitch : 7.92mm  
No. of Pos. : 1-5  
AWG : 10-16



### HR34B

IP67/IP68 Waterproof  
(When Mated,  
4pos. Receptacle)  
Rated Current : 5A Max.  
No. of Pos. : 4, 10  
AWG : 20-25